


BAMBOO SCREENS

Screen 1 – Roller Screen Information Sheet

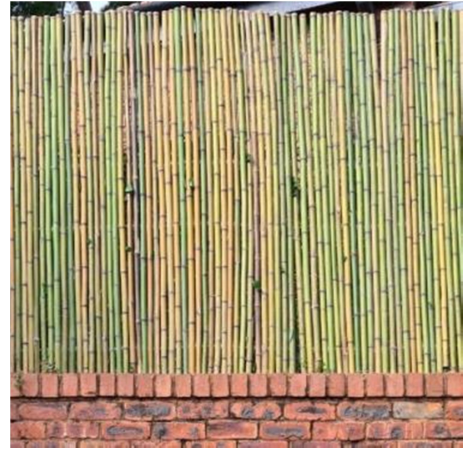

Screen dimensions:	2m high x 2m wide.
Packed screen dimensions:	300mm diam. x 2m long roll
Average screen weight:	25-30kg
Material:	Bamboo culms (poles), raw
Culm size:	30-40mm diam. Bamboo has a natural taper.
Construction method:	Culms are positioned so that the tapered ends are alternating, thus creating a more uniform overall dimension. Galvanized steel wire is threaded through the culms at 40/60cm centres. This way screens can be cut horizontally along the centre to create two 1m high screens, without any loss to the structural integrity of the screen.
Application:	Screens should be fixed to existing structures such as fences or rails, using 2mm galvanised wire, cable ties, or similar. If mounting to dry wall, ensure fixing is into studs. For interior or under-cover applications, we recommend using treated screens. Treated screens have a longer lead time. For outdoor applications, untreated screens are recommended.